
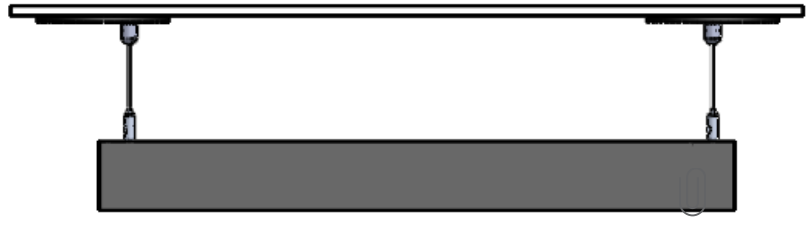
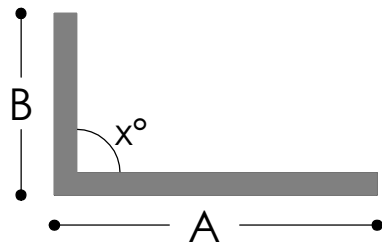
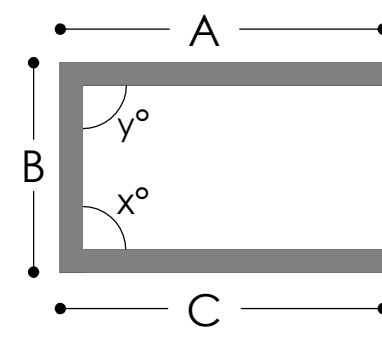
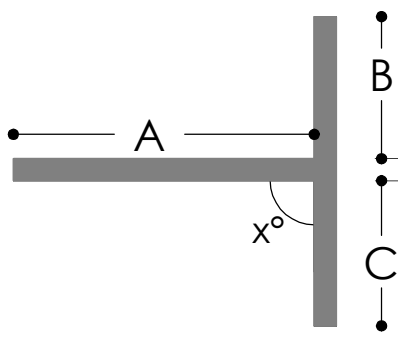
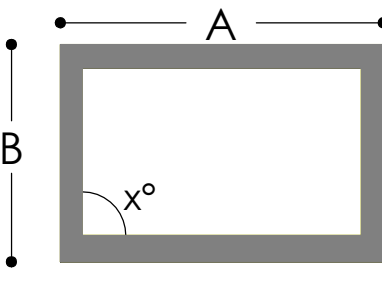
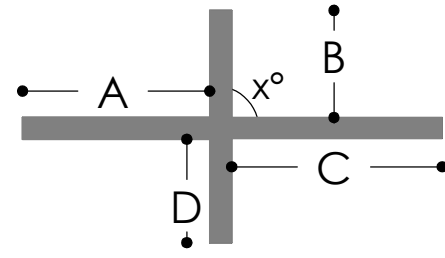



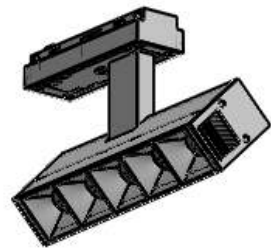
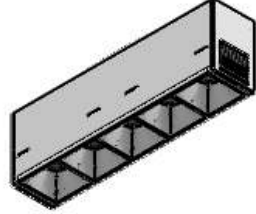




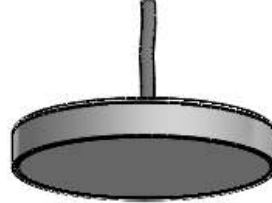


TRACK SHAPE		LENGTH (input values in Inches)		CANOPY STYLE		<div style="border: 1px solid black; padding: 5px; display: inline-block;"> MODULATED <small>MODULAR LIGHTING BY LITON</small> </div> STEALTH																								
	Linear	A																												
	L-Shape	B		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="text-align: center;">ROUND (STANDARD)</td> <td style="text-align: center;">SQUARE</td> </tr> <tr> <td style="height: 20px;"></td> <td style="height: 20px;"></td> </tr> </table>		ROUND (STANDARD)	SQUARE																							
ROUND (STANDARD)	SQUARE																													
	C-Shape	C		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="4" style="text-align: center;">PENDANT STYLE</th> </tr> <tr> <th style="width: 25%;">ARC</th> <th style="width: 25%;">CRD</th> <th style="width: 25%;">STM</th> <th style="width: 25%;">LVC</th> </tr> <tr> <td style="font-size: small;">Aircraft Cable Suspension - Adjustable</td> <td style="font-size: small;">96" Solid Cord Suspension - Adjustable</td> <td style="font-size: small;">32" Rigid Stem Suspension</td> <td style="font-size: small;">Integral Low Voltage Cable Suspension - Adjustable</td> </tr> <tr> <td style="text-align: center;"> <input type="checkbox"/> 60" <input type="checkbox"/> 150" <input type="checkbox"/> 300" </td> <td></td> <td></td> <td></td> </tr> </table>		PENDANT STYLE				ARC	CRD	STM	LVC	Aircraft Cable Suspension - Adjustable	96" Solid Cord Suspension - Adjustable	32" Rigid Stem Suspension	Integral Low Voltage Cable Suspension - Adjustable	<input type="checkbox"/> 60" <input type="checkbox"/> 150" <input type="checkbox"/> 300"												
PENDANT STYLE																														
ARC	CRD	STM	LVC																											
Aircraft Cable Suspension - Adjustable	96" Solid Cord Suspension - Adjustable	32" Rigid Stem Suspension	Integral Low Voltage Cable Suspension - Adjustable																											
<input type="checkbox"/> 60" <input type="checkbox"/> 150" <input type="checkbox"/> 300"																														
	T-Shape	D		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">POWER FEED METHOD</th> </tr> <tr> <td style="width: 50%;">NP-60DLV</td> <td style="font-size: small;">Canopy Mounted 60W Integral 120V (ELV Dimmable)</td> </tr> <tr> <td>MT-EC61</td> <td style="font-size: small;">End Cap Powered (Remote Power Supply)</td> </tr> </table>		POWER FEED METHOD		NP-60DLV	Canopy Mounted 60W Integral 120V (ELV Dimmable)	MT-EC61	End Cap Powered (Remote Power Supply)																			
POWER FEED METHOD																														
NP-60DLV	Canopy Mounted 60W Integral 120V (ELV Dimmable)																													
MT-EC61	End Cap Powered (Remote Power Supply)																													
	Rectangle	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">ANGLE (Input value in degrees)</th> </tr> <tr> <td style="width: 50%;">x°</td> <td></td> </tr> <tr> <td>y°</td> <td></td> </tr> <tr> <td colspan="2" style="font-size: small;">Leave blank for 90°</td> </tr> </table>		ANGLE (Input value in degrees)		x°		y°		Leave blank for 90°		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">DIMMING OPTION</th> </tr> <tr> <td style="width: 50%;">No Dimming Needed</td> <td></td> </tr> <tr> <td>Phase Dimming ELV/ Incandescent</td> <td></td> </tr> <tr> <td>0-10V Dimming</td> <td></td> </tr> <tr> <td>Lutron ECOsystem</td> <td></td> </tr> <tr> <td>DALI Dimming</td> <td></td> </tr> <tr> <td>DMX Dimming</td> <td></td> </tr> <tr> <td>Low Voltage PWM/POE Dimming</td> <td></td> </tr> </table>		DIMMING OPTION		No Dimming Needed		Phase Dimming ELV/ Incandescent		0-10V Dimming		Lutron ECOsystem		DALI Dimming		DMX Dimming		Low Voltage PWM/POE Dimming		
ANGLE (Input value in degrees)																														
x°																														
y°																														
Leave blank for 90°																														
DIMMING OPTION																														
No Dimming Needed																														
Phase Dimming ELV/ Incandescent																														
0-10V Dimming																														
Lutron ECOsystem																														
DALI Dimming																														
DMX Dimming																														
Low Voltage PWM/POE Dimming																														
	X-Shape	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">FINISH</th> </tr> <tr> <td style="width: 50%;">B:Black</td> <td></td> </tr> <tr> <td>W:White</td> <td></td> </tr> <tr> <td>CSTM: Custom <small>(Specify RAL Color Number)</small></td> <td></td> </tr> </table>		FINISH		B:Black		W:White		CSTM: Custom <small>(Specify RAL Color Number)</small>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="writing-mode: vertical-rl; text-orientation: mixed; text-align: center;"> STEALTH SYSTEM CONFIGURATION PENDANT </td> </tr> </table>		STEALTH SYSTEM CONFIGURATION PENDANT																
FINISH																														
B:Black																														
W:White																														
CSTM: Custom <small>(Specify RAL Color Number)</small>																														
STEALTH SYSTEM CONFIGURATION PENDANT																														

PROJECT: _____

TYPE: _____

REP: _____

DATE: _____

<p>MM1 </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM112: 1'</p> <p><input type="checkbox"/> MM124: 2'</p> <p><input type="checkbox"/> MM136: 3'</p> <p><input type="checkbox"/> MM148: 4'</p> <p><input type="checkbox"/> MM172: 6'</p> <p><input type="checkbox"/> MM196: 8'</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p> <p><input type="checkbox"/> RGB+W</p> <p><input type="checkbox"/> TWM (Warm Dim)</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Lumens/Ft</p> <p><input type="checkbox"/> Blank: 500Lm</p> <p><input type="checkbox"/> L08: 1,100Lm</p>	<p>MM2J </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM2J: 6"</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B10: 15° Narrow</p> <p><input type="checkbox"/> B20: 20° Spot</p> <p><input type="checkbox"/> B40: 40° Flood</p> <p><input type="checkbox"/> B3060: 30°x60° (Asymmetric)</p>
<p>MM2 </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM206: 6"</p> <p><input type="checkbox"/> MM212: 12"</p> <p><input type="checkbox"/> MM218: 18"</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B15: 15° Narrow</p> <p><input type="checkbox"/> B40: 40° Flood</p> <p><input type="checkbox"/> B60: 60° Wide</p> <p><input type="checkbox"/> B3060: 30°x60°</p>	<p>MM8J </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM8JB: Black</p> <p><input type="checkbox"/> MM8JW: White</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B20: 20° Spot</p> <p><input type="checkbox"/> B40: 40° Flood</p> <p><input type="checkbox"/> B3060: 30°x60° (Asymmetric)</p>	
<p>MM8 </p>	<p>QTY</p>	<p>Finish</p> <p><input type="checkbox"/> MM8B: Black</p> <p><input type="checkbox"/> MM8W: White</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B20:20° Spot</p> <p><input type="checkbox"/> B40:40° Flood</p>		<p>MM4 </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM407:650Lm</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B10: 15° Narrow</p> <p><input type="checkbox"/> B20: 20° Spot</p> <p><input type="checkbox"/> B40: 40° Flood</p>
<p>MM3 </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM307:650lm</p> <p><input type="checkbox"/> MM315:1500lm</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B10:15° Narrow</p> <p><input type="checkbox"/> B20: 20° Spot</p> <p><input type="checkbox"/> B40: 40° Flood</p> <p><input type="checkbox"/> B3060: 30°x60° (Asymmetric)</p>	<p>Options</p> <p><input type="checkbox"/> LVR:Louver</p> <p><input type="checkbox"/> SFL:Soft Focus Lens</p> <p><input type="checkbox"/> ML39: Red Filter</p> <p><input type="checkbox"/> ML40: Yellow Filter</p> <p><input type="checkbox"/> ML41: Blue Filter</p> <p><input type="checkbox"/> ML42: Amber Filter</p> <p><input type="checkbox"/> ML43: Green Filter</p>	<p>MM6PD </p>	<p>QTY</p>	<p>Size (Diameter)</p> <p><input type="checkbox"/> MM6PD05: 5"</p> <p><input type="checkbox"/> MM6PD07: 7"</p> <p><input type="checkbox"/> MM6PD12: 12"</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Cord Length</p> <p><input type="checkbox"/> 12: 12"</p> <p><input type="checkbox"/> 24: 24"</p> <p><input type="checkbox"/> 36: 36"</p> <p><input type="checkbox"/> 48: 48"</p> <p><input type="checkbox"/> 60: 60"</p> <p><input type="checkbox"/> 72: 72"</p>
<p>MM3Q </p>	<p>QTY</p>	<p>Length</p> <p><input type="checkbox"/> MM3Q: 650lm</p>	<p>CCT</p> <p><input type="checkbox"/> T27:2700K</p> <p><input type="checkbox"/> T30:3000K</p> <p><input type="checkbox"/> T35:3500K</p> <p><input type="checkbox"/> T40:4000K</p>	<p>Beam Spread</p> <p><input type="checkbox"/> B10:15° Narrow</p> <p><input type="checkbox"/> B20: 20° Spot</p> <p><input type="checkbox"/> B40: 40° Flood</p> <p><input type="checkbox"/> B3060: 30°x60° (Asymmetric)</p>	<p>Options</p> <p><input type="checkbox"/> LVR:Louver</p> <p><input type="checkbox"/> SFL:Soft Focus Lens</p> <p><input type="checkbox"/> ML39: Red Filter</p> <p><input type="checkbox"/> ML40: Yellow Filter</p> <p><input type="checkbox"/> ML41: Blue Filter</p> <p><input type="checkbox"/> ML42: Amber Filter</p> <p><input type="checkbox"/> ML43: Green Filter</p>	<p>MMEXT </p>	<p>QTY</p>	<p>Size (Diameter)</p> <p><input type="checkbox"/> MMEXT: No Stem</p> <p><input type="checkbox"/> MMEXT12: 12" Stem</p> <p><input type="checkbox"/> MMEXT24: 24" Stem</p> <p><input type="checkbox"/> MMEXT36: 36" Stem</p> <p><input type="checkbox"/> MMEXT48: 48" Stem</p>	<p>Finish</p> <p><input type="checkbox"/> B: Black</p> <p><input type="checkbox"/> W: White</p>	<p>Single/Double</p> <p><input type="checkbox"/> 1: Single Side</p> <p><input type="checkbox"/> 2: Double Sided</p>	

STEALTH
MODULATED
MODULAR LIGHTING BY LITON

STEALTH SYSTEM CONFIGURATION
FIXTURES